


M-MI SECONDARY FILTER WITH SEPARATORS




ADVANTAGES

- Available in rigid box , single or double franges with 20mm depth
- Frame: Wooden, G.I, Aluminium and Stainless Steel
- Media: Fiberglass, super fine glass filter paper as media and paper or aluminium as separator, enable large air flow
- High-strength design, suitable for turbulence air flow system
- Average Dust Spot Efficiency: 60-65%, 80-85%, 90-95%
- EN779 Classification F6, F7, F8

Depth 290mm Face Velocity vs. Pressure Drop

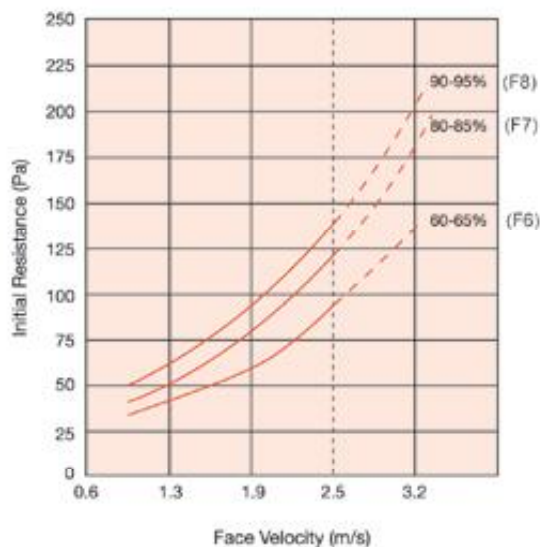

Depth 150mm Face Velocity vs. Pressure Drop

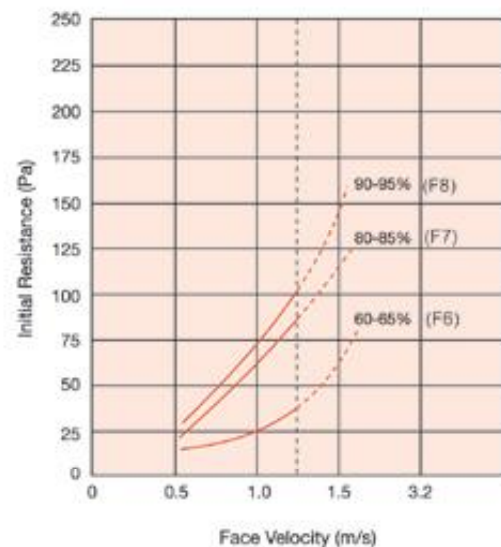

High efficiency, low air resistance and high dust loading capacity; widely used in aviation, electronics, pharmaceutical and bio-engineering.

M-MI SECONDARY FILTER TECHNICAL

DIMENSION (excluding gasket) W x H x D (mm)	RATED AIR VOLUME (m ³ /h)	PRESSURE DROP (Pa)					
		INITIAL			FINAL		
		60 - 65%	80 - 85%	90 - 95%	60 - 65%	80 - 85%	90 - 95%
305 x 610 x 290	1700	88	124	137	226	315	345
610 x 610 x 290	3400	88	124	137	226	315	345
305 x 610 x 150	850	45	88	103	120	225	265
610 x 610 x 150	1700	45	88	103	120	225	265

- Note: 1. Temperature resistance up to 80°C
- 2. Humidity resistance up to 100%
- 3. 1 mm w.g is approximate 10 Pa
- 4. 1 CFM is approximate 1.6962 CMH



MayAir Manufacturing (M) Sdn Bhd

No. 41, Jalan Anggerik Mokara 31/64, Kota Kemuning, Seksyen 31,
40460 Shah Alam, Selangor Darul Ehsan

Tel: +603-5121 2908 Fax: +603-5121 2948 Email: info@mayair.com.my